



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.28	DENG	JIN

- Material
 - ①Housing : PA66, UL94V-0
 - ②Cover : PA66, UL94V-0
 - ③Reed : Stainless steel
 - ④Pin header : Copper alloy, Tin plated

- Electrical
 - UL
 - IEC
 - Rated voltage : 300V 250V
 - Rated current : 5A 10A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 20-18AWG 1.5mm²
- Mechanical
 - Operating temperature:-40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Strip length: 9-10mm
- RoHS compliance

HOW TO ORDER

KF124A-3.81-XXP-1 X-XXXXX

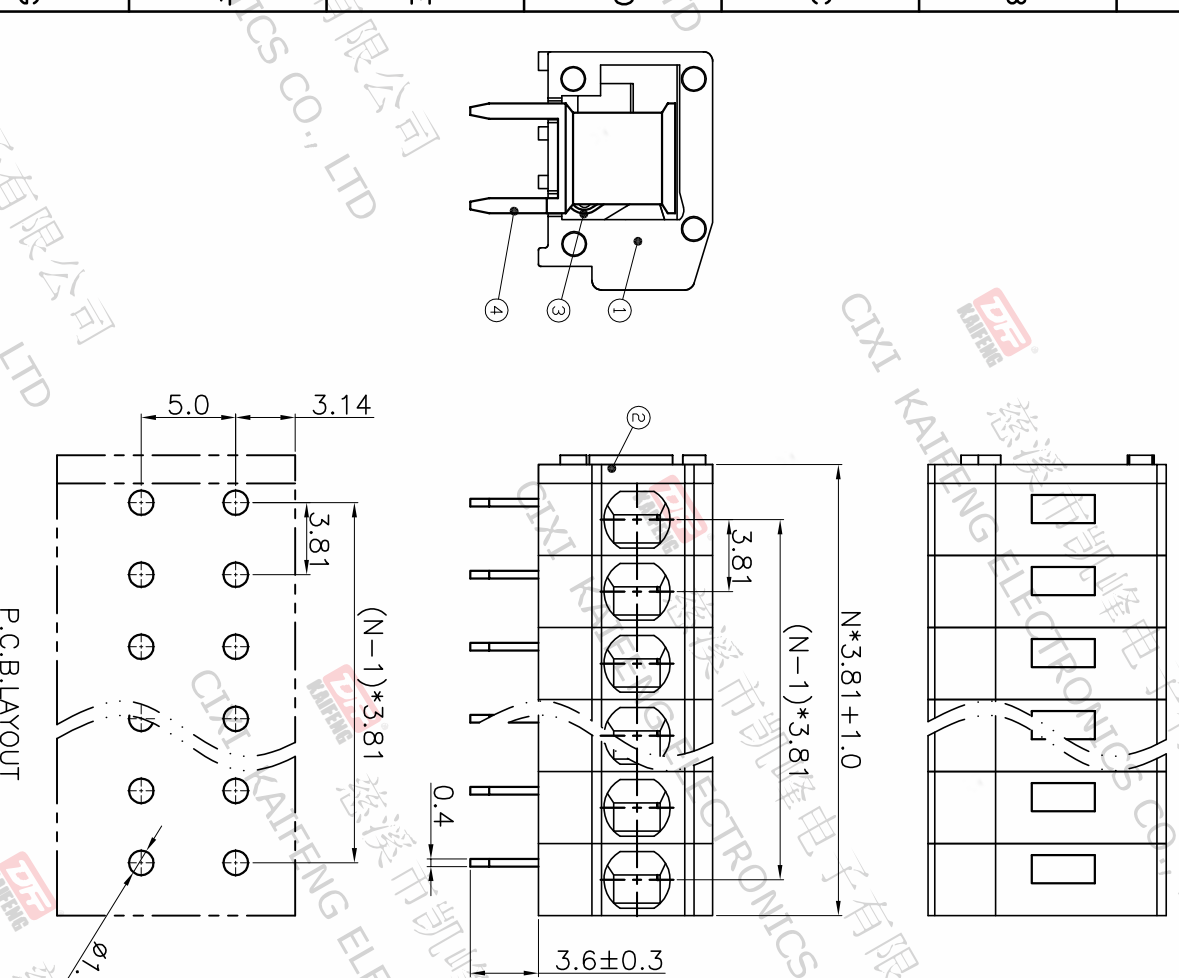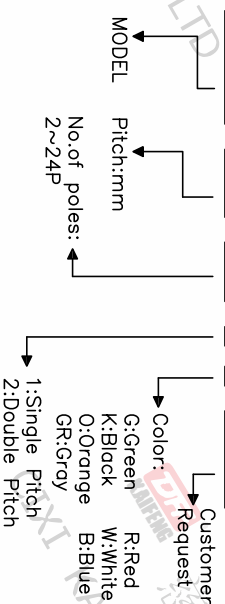

Pitch range	Nominal dimension range	PROJECTION	UNIT
>0	>0	□	mm
~6	~30	□	mm
~10	~60	□	mm
~24	~100	□	mm
~30	~150	□	mm
±0.15	±0.30	±2'	

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
DRAWING NO.	W15000272

PROJECTION	TITLE
UNIT	KF124A-3.81-XXP-1X
SHEET SIZE	A4
SERIES	KF124A

慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD